

Installation Manual - Brushed Brass Knurled Door Pull






Applicable door thickness:

Glass door: 8-22mm,Hole dia.:10mm. Wooden door: 13-42mm,Hole dia.:6mm.

Installation Instructions - Single Pull

Points 2, 3, 7, 8, 9 and 10 is for a glass door.

Points 7, 8 and 9 is for a wooden/cabinet door.

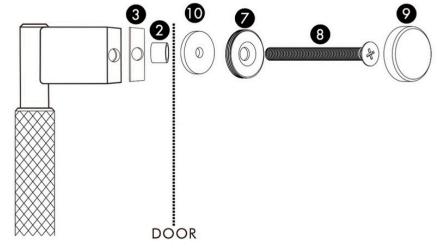



Applicable door thickness:


Glass door: 5-20mm, Hole dia.:10mm. Wooden door: 11-25mm, Hole dia.:6mm. Wooden door:40-58mm, Hole dia.:8mm.

Installation Instructions - Double Pull

Points 2, 3, 4, 5 and 6 is for a glass door.

Points 4, 5 and 6 is for a 11-25mm wooden door.

Points 1, 4, 5 and 6 is for 40-58mm wooden door.

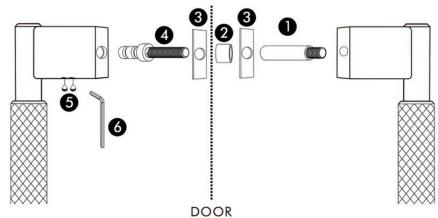




Brushed Brass Knurled Door Pull (Single - Sided)





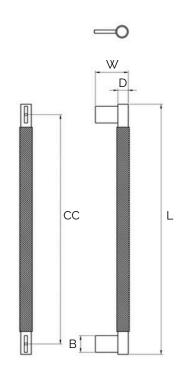


All dimensions are in mm

Sizes provided are nominal and intended as a guide

SKU	L (Length)	CC (Centre-to-Centre)	H (Height)	D (Diameter)	B (Base)
DAP-001-S300-BB	300	270	60	20	28
DAP-001-S450-BB	450	420	60	20	28
DAP-001-S600-BB	600	570	60	20	28

Inclusions:

• x2 units of the following:



• Allen key








Brushed Brass Knurled Door Pull (Double - Sided)





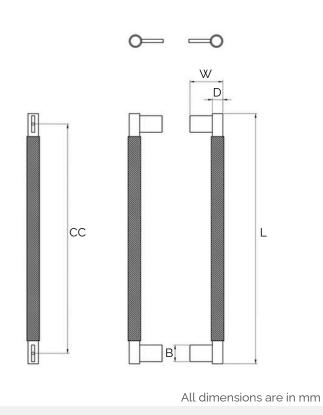


Sizes provided are nominal and intended as a guide

SKU	L (Length)	CC (Centre-to-Centre)	H (Height)	D (Diameter)	B (Base)
DAP-001-D300-BB	300	270	60	20	28
DAP-001-D450-BB	450	420	60	20	28
DAP-001-D600-BB	600	570	60	20	28

Inclusions:

• x2 units of the following:







Product Care: Wipe and clean with a damp cloth and do not use any cleaning agents or chemicals.